


# T6

CW Power to 2500W or QCW Power to 25kW

## Key Features

- 760nm to 1700nm
- Filtered water, not deionized
- Non-water alternative cooling fluids
- Scalable building block format
- Small bar-to-bar pitch for increased brightness
- Hard soldered construction
- Advanced beam conditioning
- Low pressure and water flow requirements
- Multi-wavelength in a single array

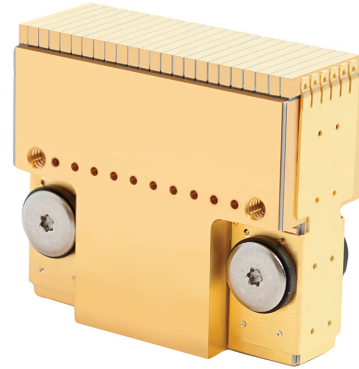

## Typical Specifications

760nm - 1100nm					
Typical Optical Parameters (@25°C)	Units	Typical Value			
Array Peak Output Power	W	1600	2000	2400	25000
Bar Emission Length	mm	10			
Operation Mode		CW			Pulsed
Operating Current	A	90	105	125	550
Number of Bars	#	up to 20			up to 50
Operating Voltage per Bar (760nm - 830nm)	V	1.9			2
Operating Voltage per Bar (850nm - 1100nm)	V	1.7			1.8
Power Conversion Efficiency	%	58			56
Bar to Bar Pitch	mm	1.1			0.35
Beam Divergence					
Fast Axis (FWHM)	°	36			32
Slow Axis (FWHM)	°	10			

1400nm - 1700nm			
Typical Optical Parameters (@25°C)	Units	Typical Value	
Array Peak Output Power	W	500	
Bar Emission Length	mm	10	
Operation Mode		CW	
Operating Current	A	80	
Number of Bars	#	up to 20	
Operating Voltage per Bar	V	1.5	
Power Conversion Efficiency	%	25	
Bar to Bar Pitch	mm	1.1	
Beam Divergence			
Fast Axis (FWHM)	°	27	
Slow Axis (FWHM)	°	10	

## Technical Drawing

